

MW 70 LED DIMMABLE

TCI LED

Dimmable (TRAILING EDGE) 12 V electronic transformer for LED bulbs and halogen lamps
Trasformatore elettronico 12 V dimmerabile (regolazione IGBT) per lampade LED e alogene


Made in Europe



SELV




Article Articolo	Code Codice	Power out W	V in Vac	V out Vac 50 kHz	ta °C	tc °C	λ max. Power Factor	Colours Colori
MW 70 LED	119772	1 ÷ 70	230 ÷ 240	12	40	90	0,98	White - Bianco



Weight - Peso gr. 80
Pcs - Pezzi 30

Wiring diagrams - Schemi di collegamento

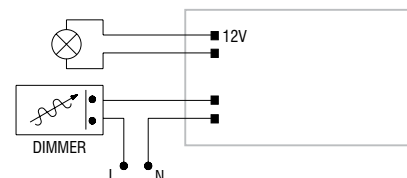

LED
LED

Voltage
Tensione
230 ÷ 240 V

Frequency
Frequenza
50...60 Hz

Power
Potenza
1 ÷ 70 W



Reference Norms
Norme di riferimento:

EN 55015
EN 60598-1
EN 61000-3-2
EN 61347-1
EN 61347-2-2
EN 61347-2-13
EN 61547
VDE 0710-T14

Lamps

Lampade:

Halogen lamps
AC supplied LED bulbs

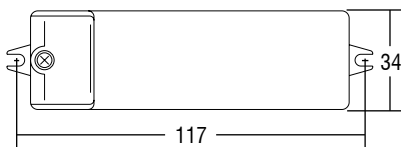

Features

- IP20 independent transformer for lamps 12 Vac:
1 ÷ 70 W halogen lamps;
1 ÷ 50 W LED lamps.
- Class II protection against electric shock for direct or indirect contact.
- Complete with terminal cover and cable retainer.
- Input and output terminal blocks on the same side (wire cross-section up to 0,5 - 2,5 mm²).
- Clamping screws on primary and secondary circuits for cables with diameter: min. 3 mm - max. 6 mm.
- Max. 18 mm cable peel-off.
- The transformer can be secured with slot for screws.
- Ultra compact size.
- Protezioni:
 - against overheating and short circuits.
 - against mains voltage spikes.
 - against overloads.

Regulation with TCI dimmer:

DU 250 - TED 700 - TD REG - X-DIM.IGBT.

24 Vac exit version available upon request.

Before use always check the compatibility with the LED lamps of the application.

Caratteristiche

- Trasformatore indipendente IP20 per lampade 12 Vac:
1 ÷ 70 W lampade alogene;
1 ÷ 50 W lampade LED.
- Protetto in classe II contro le scosse elettriche per contatti diretti e indiretti.
- Fornito di coprimersetto e fissacavo.
- Morsetti di entrata e uscita sullo stesso lato (sezione cavo fino a 0,5 - 2,5 mm²).
- Serracavo su primario e secondario per cavi di diametro: min. 3 mm - max. 6 mm.
- Sguainatura dei cavi max. 18 mm.
- Fissaggio del trasformatore tramite asole per viti.
- Dimensioni ultra compatte.
- Protezioni:
 - termica e corto circuito.
 - contro le extra tensioni di rete.
 - contro i sovraccarichi.

Regolabili con dimmer TCI:

DU 250 - TED 700 - TD REG - X-DIM.IGBT.

A richiesta disponibile versione con uscita a 24 Vac.

Prima dell'uso verificare la compatibilità con le lampade LED dell'applicazione.

